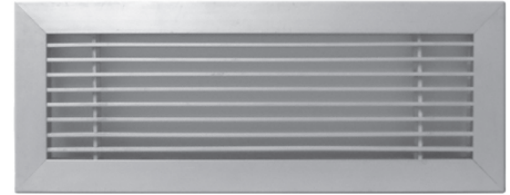



ALB Architectural Linear Bar Grille

Material: Extruded aluminum
Lengths over 72 inches supplied as multiple sections

Opposed Blade Damper (optional):
Galvanized steel construction
Key-operated through grille face

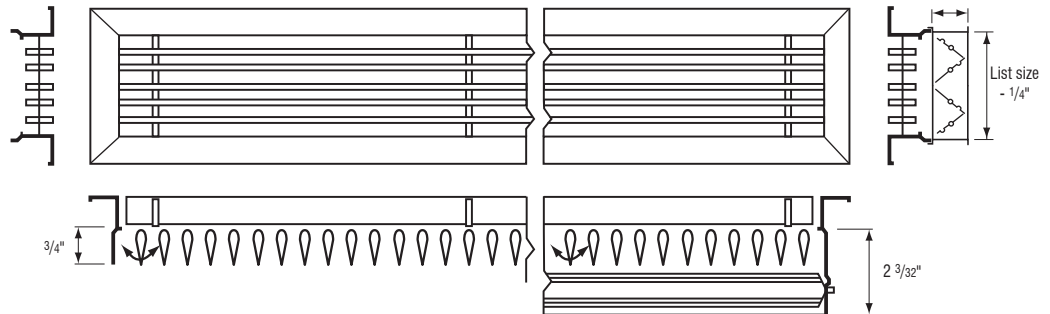


ALB40 / ALB47










☐ **ALB40 = Grille Only**

☐ **ALB47 = Grille + OBD**
(Min Width 3")








☐ **ALB40-L = Grille + Air Equalizing Deflector**
(Min Width 4")

☐ **ALB47-L = Grille + OBD + Air Equalizing Grid** (Min Width 4")


Margin Style			
-A  Listed + 9/32" 9/16" → Listed - 1/4" N/A with -3, -5, -RM	-B  Listed + 7/8" 7/8" → Listed - 1/4" N/A with -5, -SB, -RM	-E  Listed + 1 1/4" 1 1/16" → Listed - 1/4" N/A with -5, -SB, -RM	-F  Listed + 1 3/8" 1" → Listed - 1/4" Only with -1, -3, -5, -SB, -RM
-G  Listed - 1/4" 3/16" → Listed - 1/4" Only with -1, -RM	-R  Listed + 1 1/4" 1 1/16" → Listed - 1/4" N/A with -SB, -RM	-T  Listed - 1/4" 1 1/16" → Listed - 1 3/4" N/A with -2, -3, -5, -SB, -RM	



Fastening Method	
No Fastening -1  N/A with -F, -G, -T	Spring clip -2  N/A with -F, -G, -T
Screw -3  N/A with -A, -G, -T	Concealed -4  N/A with -F, -G Min Width 4"
Core spring clips -5  Only with combined -F-RM	

Finish					
<input type="checkbox"/> /W Powder Coated White	<input type="checkbox"/> /M Mill Finish	<input type="checkbox"/> /A Anodized	<input type="checkbox"/> /B Brushed Aluminum N/A with -G, -R	<input type="checkbox"/> /L Brushed and Lacquered N/A with -G, -R	<input type="checkbox"/> /Custom Specify here:

- ☐ **Security Ceiling Wire -CW**
- ☐ **Mounting Brackets for Sheetrock -SB**
(3/4" from the face) Only w/ -A -G
- ☐ **Reinforced Floor Application -RF**
(6" max width recommended for high traffic, 8" max width for occasional traffic)
- ☐ **Removable Core Application -RM**
Only w/ -F, -G
- ☐ **Frame Gasket -GK**
- ☐ **Vertical Bars -V**



Up to 1/8 inch increments without damper.

Dimensions shown contain expansion tolerances based on temperature rise of 40°F above the ambient temperature at which the material is fabricated.

Schedule Type: _____

Project: _____

Architect: _____

Engineer: _____

Contractor: _____