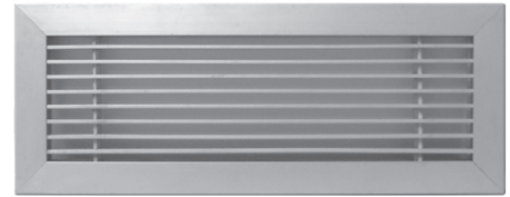

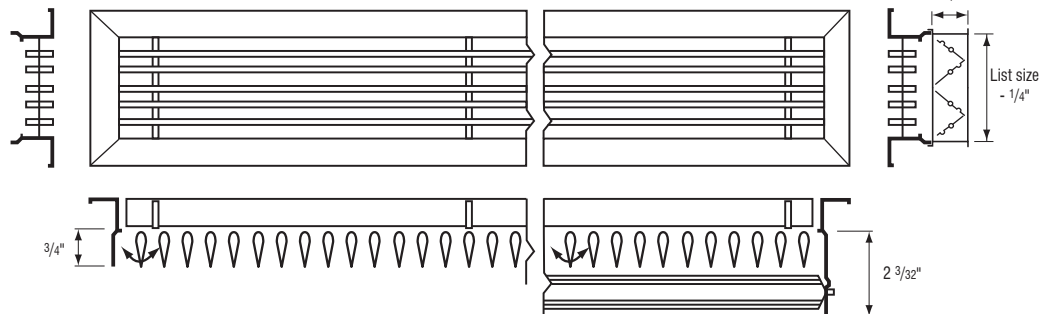
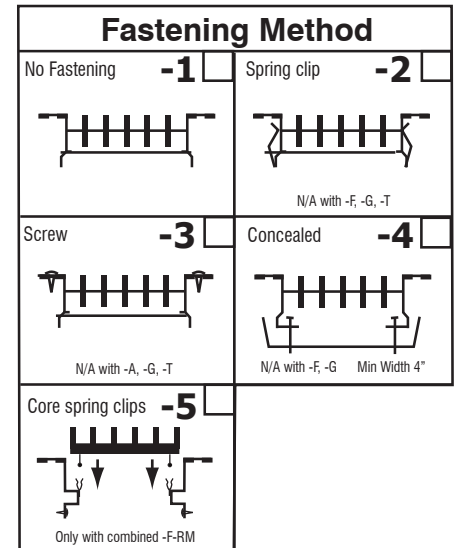
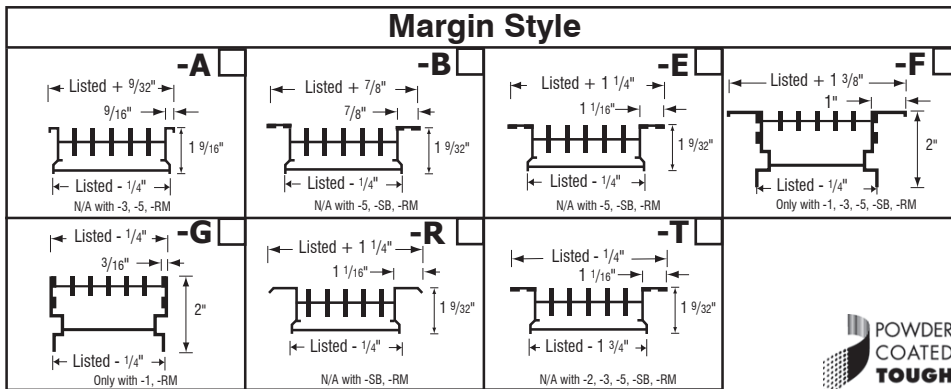


## ALB Architectural Linear Bar Grille

**Material:** Extruded aluminum  
Lengths over 72 inches supplied as multiple sections


**Opposed Blade Damper (optional):**  
Galvanized steel construction  
Key-operated through grille face


**ALB60 / ALB67**

 **ALB60 = Grille Only**
 **ALB67 = Grille + OBD**  
(Min Width 3")

 **ALB60-L = Grille + Air Equalizing Deflector**  
(Min Width 4")

 **ALB67-L = Grille + OBD + Air Equalizing Deflector**  
(Min Width 4")


Finish					
/W Powder Coated White	/M Mill Finish	/A Anodized	/B Brushed Aluminum N/A with -G, -R	/L Brushed and Lacquered N/A with -G, -R	/Custom Specify here:

- Security Ceiling Wire -CW**
- Mounting Brackets for Sheetrock -SB**  
(3/4" from the face) Only w/ -A -G
- Reinforced Floor Application -RF**  
(6" max width recommended for high traffic, 8" max width for occasional traffic)
- Removable Core Application -RM**  
Only w/ -F, -G
- Frame Gasket -GK**
- Vertical Bars -V**



Up to 1/8 inch increments without damper.  
Dimensions shown contain expansion tolerances based on temperature rise of 40°F above the ambient temperature at which the material is fabricated.

Schedule Type:	_____
Project:	_____
Architect:	_____
Engineer:	_____
Contractor:	_____