

RETURN AIR Rev. 3 ACOUSTICAL ACCESS PANELS

Model PPS

Peripheral Return Air Access Panel - Side Swing Door For vertical stack heat pumps, fan coils & air handlers <u>Reversible for right or left swing</u>

Powder paint tough coating provides a finished appearance in living areas with a sleek-looking peripheral return air opening between the door and the walled-in frame.

Acoustical lining on the access door absorbs internal noise and attenuate its transmission to the living area. Door provides access for filter change and for retrieval of the unit's chassis for maintenance. PPU available for tighter access in front of panel. Removable core is offered for tighter available width and height, see model PPS-R, in our offering.


Three standard frame profiles provide three choices of width for the peripheral return air opening namely PPSA (1.1" wide) PPSB (1.6" wide) PPSC (2.1" wide) allowing the designer to adjust the free area to the capacity of the unit. (see standard frame profiles below)

Features

- Reversible for left or right swing (except with thermostat slots)
- Sturdy welded construction
- Made of galvanized steel 22 ga. default,
- other gauges (optional)

• Scratch-resistant powder paint, white is standard, other colors (optional)

- · Heavy duty vertical hinges
- Magnetic catches (default)
- Key lock and various quarter-turn latches (optional)
- 5/8" acoustical fiberglass insulation

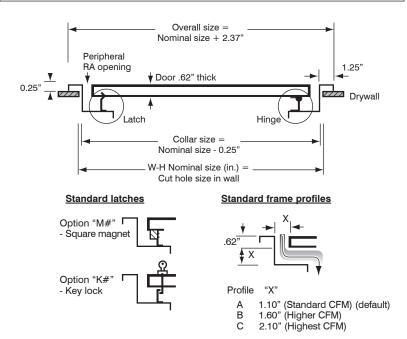



Simple to order PPS:

Standard units with or without options require no drawings for production, just specify PPSA, PPSB or PPSC frame profile and wall opening width and height in the model number below for ordering standard units. Add option suffix for ordering options. Custom designs are available and necessitate a drawing.

How to Order?

See How to Order Access Panels Series document: airvector-panels.com/how-to-order